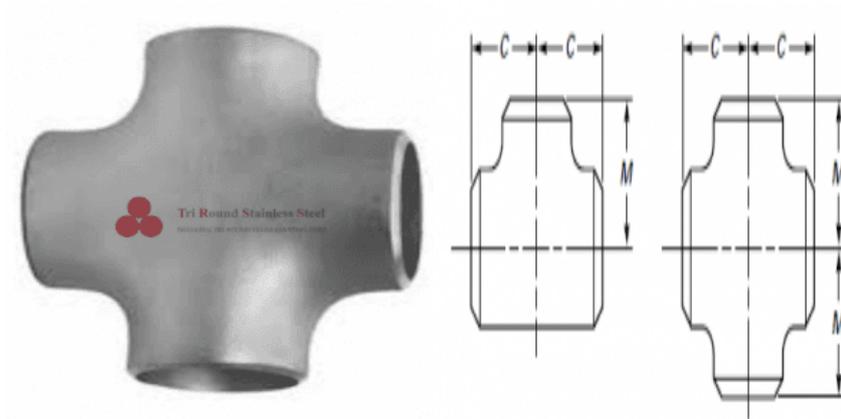

Butt Weld Fittings Cross



Cross

Executive Standard:

ASME/ANSI B16.9, ASME/ANSI B16.28, MSS-SP-43, MSS-SP-75,

DIN2605, JIS B2311/2312/2313, GB12459, GB/T13401, SH3408, SH3409, ISO 3419, ISO 5251, HG/T21635, HG/T21631 etc.

Material:

WP304, WP304L, WP304/304L WP310S, WP316, WP316L, WP316/WP316L, WP317L, WP321, WP321H, WP347, WP347H, 904L,

S31803, S32750, S31760, S31254, INCONEL 625

Dimension:

| Nominal Pipe Size (NPS) | DN | Outside Diameter at Bevel | Center-to-End | |
|----------------------------------|------|---------------------------------|---------------|----------------------------------|
| | | | Run, C | Outlet, M [Notes (1) and (2)] |
| 1/2 | 15 | 21.3 | 25 | 25 |
| 3/4 | 20 | 26.7 | 29 | 29 |
| 1 | 25 | 33.4 | 38 | 38 |
| 1 1/4 | 32 | 42.2 | 48 | 48 |
| 1 1/2 | 40 | 48.3 | 57 | 57 |
| 2 | 50 | 60.3 | 64 | 64 |
| 2 1/2 | 65 | 73.0 | 76 | 76 |
| 3 | 80 | 88.9 | 86 | 86 |
| 3 1/2 | 90 | 101.6 | 95 | 95 |
| 4 | 100 | 114.3 | 105 | 105 |
| 5 | 125 | 141.3 | 124 | 124 |
| 6 | 150 | 168.3 | 143 | 143 |
| 8 | 200 | 219.1 | 178 | 178 |
| 10 | 250 | 273.0 | 216 | 216 |
| 12 | 300 | 323.8 | 254 | 254 |
| 14 | 350 | 355.6 | 279 | 279 |
| 16 | 400 | 406.4 | 305 | 305 |
| 18 | 450 | 457 | 343 | 343 |
| 20 | 500 | 508 | 381 | 381 |
| 22 | 550 | 559 | 419 | 419 |
| 24 | 600 | 610 | 432 | 432 |
| 26 | 650 | 660 | 495 | 495 |
| 28 | 700 | 711 | 521 | 521 |
| 30 | 750 | 762 | 559 | 559 |
| 32 | 800 | 813 | 597 | 597 |
| 34 | 850 | 864 | 635 | 635 |
| 36 | 900 | 914 | 673 | 673 |
| 38 | 950 | 965 | 711 | 711 |
| 40 | 1000 | 1016 | 749 | 749 |
| 42 | 1050 | 1067 | 762 | 711 |
| 44 | 1100 | 1118 | 813 | 762 |
| 46 | 1150 | 1168 | 851 | 800 |
| 48 | 1200 | 1219 | 889 | 838 |

Seamless: 1/2" to 20" (DN15 ~DN500)

Welded: 1/2" to 48" (DN15~DN1200)

· Wall Thickness: SCH5S to SCH160 XS, XXS

· Process: Cold & Mandrel Forming

Product link : <https://www.triround-inox.com/butt-weld-fittings-cross.html>