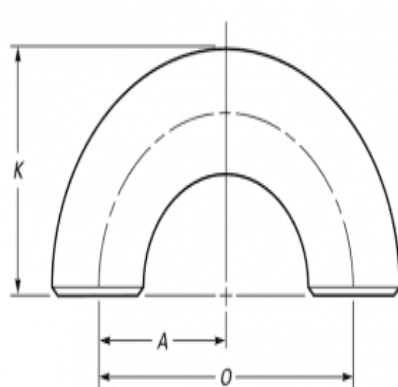

Butt Weld Fittings Elbows 180° Elbow LR



180° Elbow LR

45°,90°,180°Elbow (1.0D, 1.5D, 2.5D,5D,10D,)

Executive Standard:

ASME/ANSI B16.9, ASME/ANSI B16.28, MSS-SP-43, MSS-SP-75,

DIN2605, JIS B2311/2312/2313, GB12459, GB/T13401, SH3408, SH3409, ISO 3419, ISO 5251,HG/T21635 ,HG/T21631 etc.

• Material:

WP304, WP304L, WP304/304L WP310S, WP316, WP316L, WP316/WP316L, WP317L, WP321, WP321H, WP347, WP347H, 904L,

S31803, S32750, S31760, S31254, INCONEL 625

• Dimension:

Nominal Pipe Size (NPS)	DN	Outside Diameter at Bevel	Center-to-End	
			90 Deg Elbows, A	45 Deg Elbows, B
1/2	15	21.3	38	16
3/4	20 [Note (1)]	26.7	38	19
1	25	33.4	38	22
1 1/4	32	42.2	48	25
1 1/2	40	48.3	57	29
2	50	60.3	76	35
2 1/2	65	73.0	95	44
3	80	88.9	114	51
3 1/2	90	101.6	133	57
4	100	114.3	152	64
5	125	141.3	190	79
6	150	168.3	229	95
8	200	219.1	305	127
10	250	273.0	381	159
12	300	323.8	457	190
14	350	355.6	533	222
16	400	406.4	610	254
18	450	457	686	286
20	500	508	762	318
22	550	559	838	343
24	600	610	914	381
26	650	660	991	405
28	700	711	1067	438
30	750	762	1143	470
32	800	813	1219	502
34	850	864	1295	533
36	900	914	1372	565
38	950	965	1448	600
40	1000	1016	1524	632
42	1050	1067	1600	660
44	1100	1118	1676	695
46	1150	1168	1753	727
48	1200	1219	1829	759

Seamless: 1/2" to 20" (DN15 ~DN500)

Welded: 1/2" to 48" (DN15~DN1200)

· Wall Thickness: SCH5S to SCH160 XS, XXS

· Process: Cold & Mandrel Forming

Product link : <https://www.triround-inox.com/butt-weld-fittings-elbows-180-elbow-lr.html>