

3-PC BALL VALVE FULL PORT 1000WOG PN63 TECHNICAL TYPE

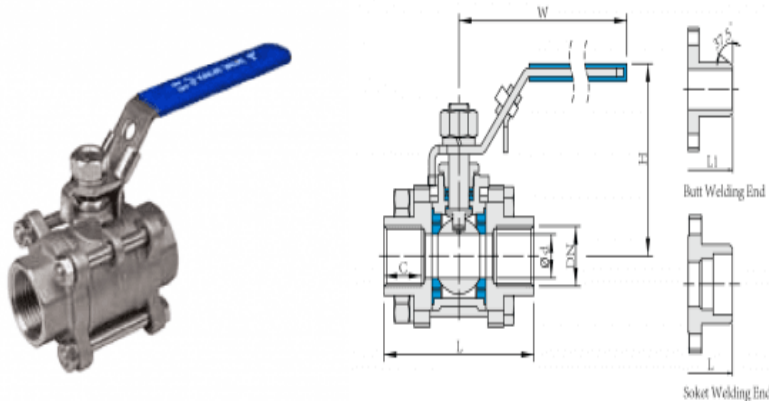

Products in Triround covers high, middle, low pressure valves with manual and pneumatic actuators, including flanged end ball valve, gate valve, globe valve, Y-strainer, check valve, silk buckled ball valve, quick coupler, sanitary valves and etc. We adopt standards like ANSI, API, JIS, BS, DIN, GB, HG and so on. They are widely applied in industries like petroleum, chemicals, nature gas, light industry, power supply, pharmacy, metallurgy, water supply, and etc.

Type: TR-301

PRODUCTS STANDARD

- Blow-Out Proof Stem 防脱出阀杆
- Investment Casting Body 精密铸造阀体
- Full Port 全通径设计
- Pressure Blance Hole In Ball Solt 球槽减压孔设计
- All Kinds Of Thread Available 各种螺纹标准
- Locking Device Handle Available 手柄锁定装置
- Design Acc:ASME B16.34 设计标准：ASME B16.34
- Thread Acc:ANSI B1.20.1 螺纹标准：

ANSI B1.20.1


BS 21/2799

DIN 259/2999


ISO 228

- Inspection & Testing Acc:API598 检测标准：API 598

Specifications

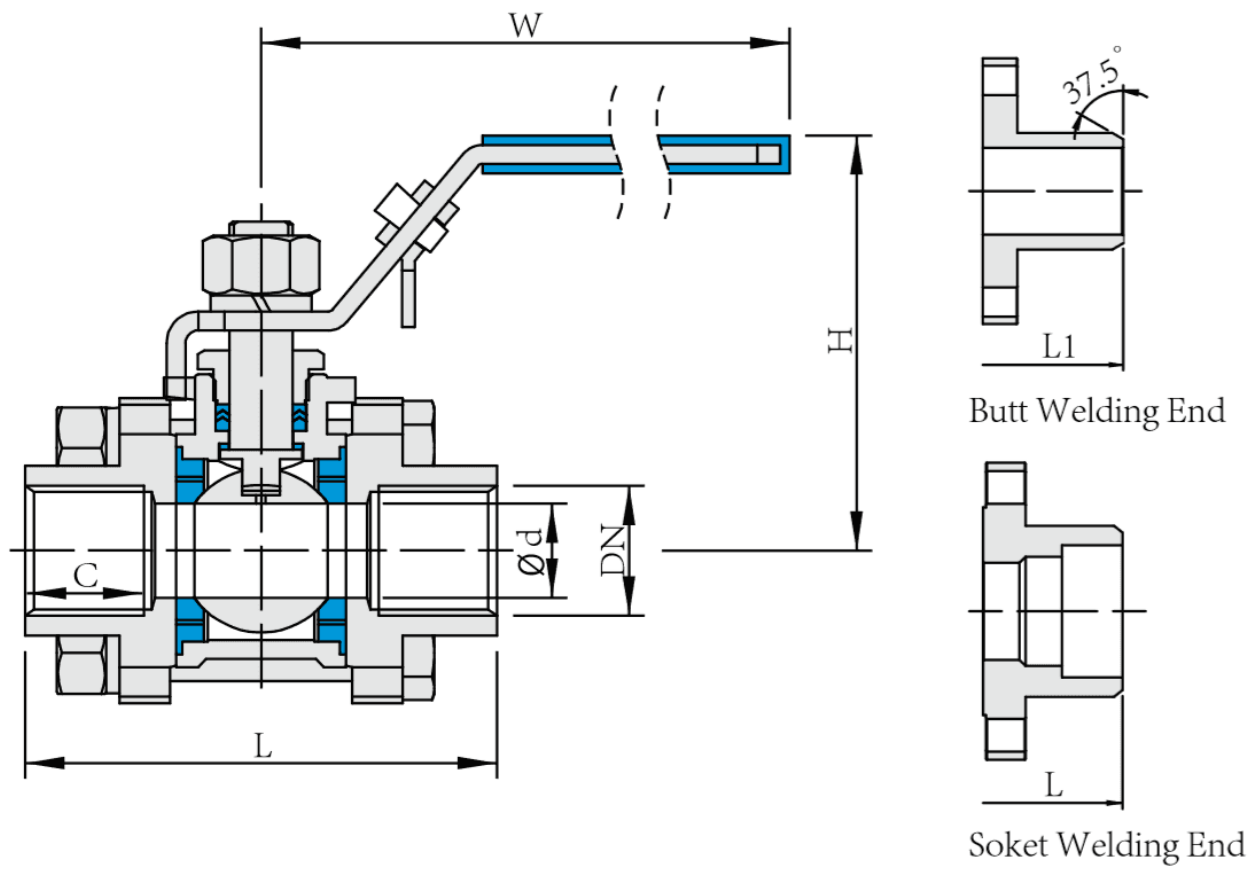

Pressure-Temperature
Rating 1/2"~4"

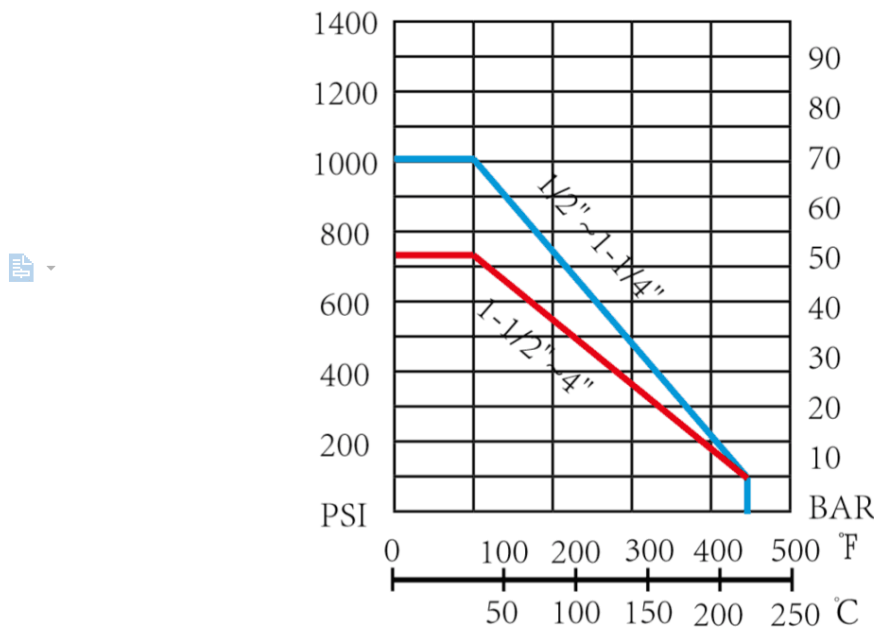

Chemical Compositions:

元素, % (除给出范围外, 其余均为最大含量)	CF3 CF3A J92700	CF8 CF8A J92600	CF3M CF3MA J92800	CF8M J92900	CF3MN J92804	CF8C J92710	CF10 J92950	CF10M J92901	CH8 J93400	CH10 J93401	CH20 J93402	CK20 J94202	HK30 J94203	HK40 J94204
碳 (C)	0.03	0.08	0.03	0.08	0.03	0.08	0.04 — 0.10	0.04 — 0.10	0.08	0.04 — 0.10	0.04 — 0.20	0.04 — 0.20	0.25 — 0.35	0.35 — 0.45
锰 (Mn)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
硅 (Si)	2.00	2.00	1.50	1.50	1.50	2.00	2.00	1.50	1.50	2.00	2.00	1.75	1.75	1.75
硫 (S)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
磷 (P)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
铬 (Cr)	17.0 — 21.0	18.0 — 21.0	17.0 — 21.0	18.0 — 21.0	17.0 — 21.0	18.0 — 21.0	18.0 — 21.0	18.0 — 21.0	22.0 — 26.0	22.0 — 26.0	22.0 — 26.0	23.0 — 27.0	23.0 — 27.0	23.0 — 27.0
镍 (Ni)	8.0 — 12.0	8.0 — 11.0	9.0 — 13.0	9.0 — 12.0	9.0 — 13.0	9.0 — 12.0	8.0 — 11.0	9.0 — 12.0	12.0 — 15.0	12.0 — 15.0	12.0 — 15.0	19.0 — 22.0	19.0 — 22.0	19.0 — 22.0
钼 (Mo)	0.50	0.50	2.0 — 3.0	2.0 — 3.0	2.0 — 3.0	0.50	0.50	2.0 — 3.0	0.50	0.50	0.50	0.50	0.50	0.50

Tensile Requirements:

	CF3 J92700	CF3A J92700	CF8 J92600	CF8A J92600	CF3M J92800	CF3MA J92800	CF8M J92900	CF3MN J92804	CF8C J92710	CF10 J92950	CF10M J92901	CH8 J93400	CH10 J93401	CH20 J93402	CK20 J94202	HK30 J94203	HK40 J94204
抗拉强度, 最小 千磅/英寸 ² (MPa)	70 (485)	77 (530)	70 (485)	77 (530)	70 (485)	80 (550)	70 (485)	75 (515)	70 (485)	70 (485)	70 (485)	65 (450)	70 (485)	70 (485)	65 (450)	65 (450)	62 (425)
屈服强度 ^A , 最小 千磅/英寸 ² (MPa)	30 (205)	35 (240)	30 (205)	35 (240)	30 (205)	37 (255)	30 (205)	37 (255)	30 (205)	30 (205)	30 (205)	28 (195)	30 (205)	30 (205)	28 (195)	35 (240)	35 (240)
延伸率, 2 英寸或 50mm ^B 标距 最小, %	35.0	35.0	35.0	35.0	30.0	30.0	30.0	35.0	30.0	35.0	30.0	30.0	30.0	30.0	30.0	10.0	10.0

Heat treatment requirements:

钢牌号	最低温度	
	°F	°C
HK30, HK40, HT30, CT15C	铸造状态供货	铸造状态供货
CF3, CF3A, CF8, CF8A, CF3M CF3MA, CF8M, CF3MN, CG3M, CF10 CF10M, CG8M	1900	1040
CF10SMnN, CF8C, CF10MC	1950	1065
CN7M, CG6MMN, CE8MN	2050	1120
CK3MCuN, CN3MN, CH8, CH10, CH20, CK20	2100	1150
CE20N ^A	2225	1220

Here is one of workshops.



Here is one of workshops.



Chemical Compostions:

元素, % (除给出范围外, 其 余均为最大含量)	CF3 CF3A J92700	CF8 CF8A J92600	CF3M CF3MA J92800	CF8M J92900	CF3MN J92804	CF8C J92710	CF10 J92950	CF10M J92901	CH8 J93400	CH10 J93401	CH20 J93402	CK20 J94202	HK30 J94203	HK40 J94204
碳 (C)	0.03	0.08	0.03	0.08	0.03	0.08	0.04 - 0.10	0.04 - 0.10	0.08	0.04 - 0.10	0.04 - 0.20	0.04 - 0.20	0.25 - 0.35	0.35 - 0.45
锰 (Mn)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
硅 (Si)	2.00	2.00	1.50	1.50	1.50	2.00	2.00	1.50	1.50	2.00	2.00	1.75	1.75	1.75
硫 (S)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
磷 (P)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
铬 (Cr)	17.0 - 21.0	18.0 - 21.0	17.0 - 21.0	18.0 - 21.0	17.0 - 21.0	18.0 - 21.0	18.0 - 21.0	18.0 - 21.0	22.0 - 26.0	22.0 - 26.0	22.0 - 26.0	23.0 - 27.0	23.0 - 27.0	23.0 - 27.0
镍 (Ni)	8.0 - 12.0	8.0 - 11.0	9.0 - 13.0	9.0 - 12.0	9.0 - 13.0	9.0 - 12.0	8.0 - 11.0	9.0 - 12.0	12.0 - 15.0	12.0 - 15.0	12.0 - 15.0	19.0 - 22.0	19.0 - 22.0	19.0 - 22.0
钼 (Mo)	0.50	0.50	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	0.50	0.50	2.0 - 3.0	0.50	0.50	0.50	0.50	0.50	0.50

Tensile Requirements:

	CF3 J92700	CF3A J92700	CF8 J92600	CF8A J92600	CF3M J92800	CF3MA J92800	CF8M J92900	CF3MN J92804	CF8C J92710	CF10 J92950	CF10M J92901	CH8 J93400	CH10 J93401	CH20 J93402	CK20 J94202	HK30 J94203	HK40 J94204
抗拉强度, 最小 千磅/英寸 ² (MPa)	70 (485)	77 (530)	70 (485)	77 (530)	70 (485)	80 (550)	70 (485)	75 (515)	70 (485)	70 (485)	70 (485)	65 (450)	70 (485)	70 (485)	65 (450)	65 (450)	62 (425)
屈服强度 ^A , 最小 千磅/英寸 ² (MPa)	30 (205)	35 (240)	30 (205)	35 (240)	30 (205)	37 (255)	30 (205)	37 (255)	30 (205)	30 (205)	30 (205)	28 (195)	30 (205)	30 (205)	28 (195)	35 (240)	35 (240)
延伸率, 2 英寸或 50mm 标距 ^B 最小, %	35.0	35.0	35.0	35.0	30.0	30.0	30.0	35.0	30.0	35.0	30.0	30.0	30.0	30.0	30.0	10.0	10.0

Heat treatment-requirements:

钢牌号	最低温度	
	°F	°C
HK30, HK40, HT30, CT15C	铸造状态供货	铸造状态供货
CF3, CF3A, CF8, CF8A, CF3M CF3MA, CF8M, CF3MN, CG3M, CF10 CF10M, CG8M	1900	1040
CF10SMnN, CF8C, CF10MC	1950	1065
CN7M, CG6MMN, CE8MN	2050	1120
CK3MCuN, CN3MN, CH8, CH10, CH20, CK20	2100	1150
CE20N ^A	2225	1220

Here is one of workshops.



Here is one of workshops.



Chemical Composition Testing:



Packing:



Wooden Box Packing:



For more information, welcome to make an inquiry.

Product

link : <https://www.triround-inox.com/3-pc-ball-valve-full-port-1000wog-pn63-technical-type.html>