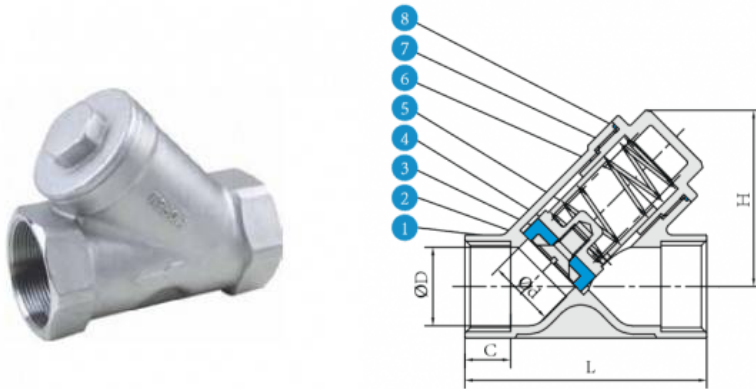

Y-Type Check Valve 800WOG,PN40



Products in Triround covers high, middle, low pressure valves with manual and pneumatic actuators, including flanged end ball valve, gate valve, globe valve, Y-strainer, check valve, silk buckled ball valve, quick coupler, sanitary valves and etc. We adopt standards like ANSI, API, JIS, BS, DIN, GB, HG and so on. They are widely applied in industries like petroleum, chemicals, nature gas, light industry, power supply, pharmacy, metallurgy, water supply, and etc.

Type:TR-102

PRODUCTS STANDARD

- Investment Casting Body 精密铸造阀体
- 800WOG PN40 压力等级
- Design Acc:ASME B16.34 设计标准 : ASME B16.34
- Screw End Standard:DIN2999/DIN259/BSP/NPT
- ISO228-1/BS21/2779
- Inspection & Testing Acc:API598 检测标准 : API598

MATERIAL LIST			
ITEM NO	PART NAME	MATERIAL	
1	Body 阀体	CF8M	CF8
2	Gasket 密封垫	SS304	
3	Seat 阀座	PTFE	
4	Bolt 螺栓	SS304	
5	Disc 阀瓣	CF8M	CF8
6	Spring 弹簧	SS316	SS304
7	Cap 阀盖	CF8M	CF8
8	Gasket 密封圈	PTFE	

unit:mm

SIZE	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
d	15	20	25	32	38	48	65	80	100
D	17.5	23	29	38	43.5	55	66	81.5	106.5
H	44.7	52.1	65.7	70	79.5	95.5	125.5	155	205
C	14	15	17	19	19	22	25	27	35
L	65	75	90	110	120	140	185	205	240

Chemical Compositions :

元素, % (除给出范围外, 其 余均为最大含量)	CF3 CF3A J92700	CF8 CF8A J92600	CF3M CF3MA J92800	CF8M J92900	CF3MN J92804	CF8C J92710	CF10 J92950	CF10M J92901	CH8 J93400	CH10 J93401	CH20 J93402	CK20 J94202	HK30 J94203	HK40 J94204
碳 (C)	0.03	0.08	0.03	0.08	0.03	0.08	0.04 - 0.10	0.04 - 0.10	0.08	0.04 - 0.10	0.04 - 0.20	0.04 - 0.20	0.25 - 0.35	0.35 - 0.45
锰 (Mn)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
硅 (Si)	2.00	2.00	1.50	1.50	1.50	2.00	2.00	1.50	1.50	2.00	2.00	1.75	1.75	1.75
硫 (S)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
磷 (P)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
铬 (Cr)	17.0 - 21.0	18.0 - 21.0	17.0 - 21.0	18.0 - 21.0	17.0 - 21.0	18.0 - 21.0	18.0 - 21.0	18.0 - 21.0	22.0 - 26.0	22.0 - 26.0	22.0 - 26.0	23.0 - 27.0	23.0 - 27.0	23.0 - 27.0
镍 (Ni)	8.0 - 12.0	8.0 - 11.0	9.0 - 13.0	9.0 - 12.0	9.0 - 13.0	9.0 - 12.0	8.0 - 11.0	9.0 - 12.0	12.0 - 15.0	12.0 - 15.0	12.0 - 15.0	19.0 - 22.0	19.0 - 22.0	19.0 - 22.0
钼 (Mo)	0.50	0.50	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	0.50	0.50	2.0 - 3.0	0.50	0.50	0.50	0.50	0.50	0.50

Tensile Requirements:

	CF3 J92700	CF3A J92700	CF8 J92600	CF8A J92600	CF3M J92800	CF3MA J92800	CF8M J92900	CF3MN J92804	CF8C J92710	CF10 J92950	CF10M J92901	CH8 J93400	CH10 J93401	CH20 J93402	CK20 J94202	HK30 J94203	HK40 J94204
抗拉强度, 最小 千磅/英寸 ² (MPa)	70 (485)	77 (530)	70 (485)	77 (530)	70 (485)	80 (550)	70 (485)	75 (515)	70 (485)	70 (485)	70 (485)	65 (450)	70 (485)	70 (485)	65 (450)	65 (450)	62 (425)
屈服强度 ^A , 最小 千磅/英寸 ² (MPa)	30 (205)	35 (240)	30 (205)	35 (240)	30 (205)	37 (255)	30 (205)	37 (255)	30 (205)	30 (205)	30 (205)	28 (195)	30 (205)	30 (205)	28 (195)	35 (240)	35 (240)
延伸率, 2 英寸或 50mm ^B 标距 ^B 最小, %	35.0	35.0	35.0	35.0	30.0	30.0	30.0	35.0	30.0	35.0	30.0	30.0	30.0	30.0	30.0	10.0	10.0

HEAT TREATMENT-REQUIREMENTS:

钢牌号	最低温度	
	°F	°C
HK30, HK40, HT30, CT15C	铸造状态供货	铸造状态供货
CF3, CF3A, CF8, CF8A, CF3M CF3MA, CF8M, CF3MN, CG3M, CF10 CF10M, CG8M	1900	1040
CF10SMnN, CF8C, CF10MC	1950	1065
CN7M, CG6MMN, CE8MN	2050	1120
CK3MCuN, CN3MN, CH8, CH10, CH20, CK20	2100	1150
CE20N ^A	2225	1220

Here is one of workshops.



Here is one of workshops.



Chemical Composition Testing:



Packing:





For more information , welcome to contact with us.

Product link : <https://www.triround-inox.com/y-type-check-valve-800wogpn40.html>