


Double Pin Heavy Duty Clamp (13MHMM-DP)

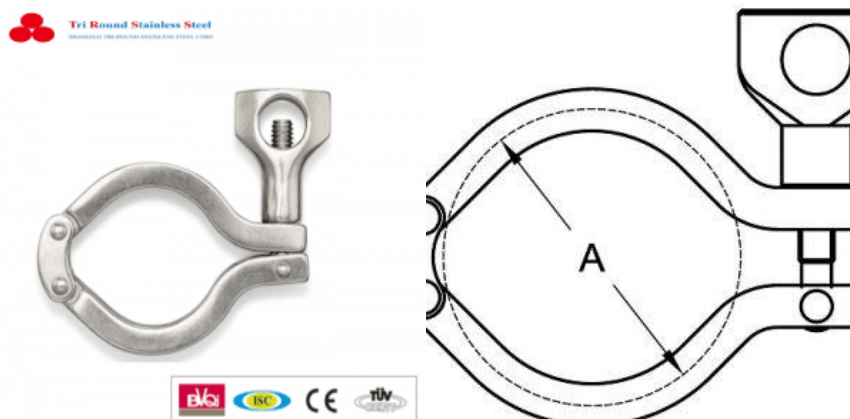

Double Pin Heavy Duty Clamp

All clamps are T304 Stainless Steel.

Pressure ratings assume wing nut tightened to 25 in/lb of torque.


Securely connect tri-clamp ends with heavy duty, stainless steel double pin clamp (13MHMM-DP)

The double pin heavy duty clamp with a wingnut is made from 304 stainless steel alloy. It is used to join two separate tri-clamp ends to one another and allows for more flexibility than the single-pin heavy duty clamp. A tri-clamp rubber gasket should be placed between the two flange ends to ensure proper fit and secure connection. Do not over tighten wing-nut as this may damage product.

Size (Tube OD)	Service Pressure Rating at 70°F		Service Pr
1/2" – 3/4"	1,500		
1" – 1 1/2"	500		
2"	450		
2-1/2"	400		
3"	350		
4"	300		
6"	150		
8"	100		
10"	75		

TRI-CLAMP FITTINGS AND GASKET SIZING GUIDE

**Outside Diameter
(OD)**

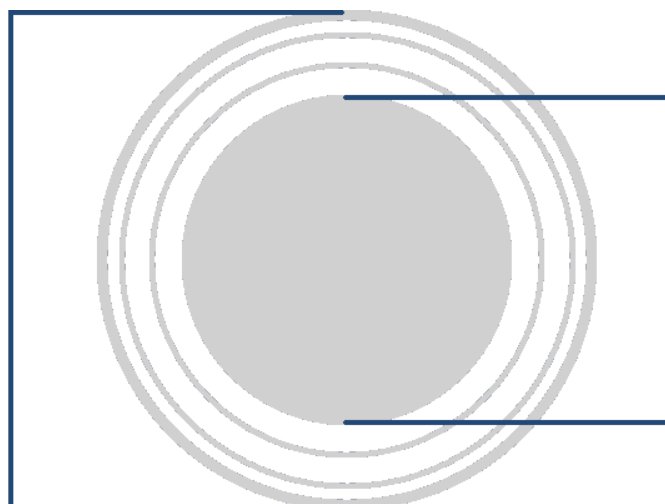

**Inside Diameter
(ID)**

Sanitary Size	OD of Flange End		
1/2"	0.992		
3/4"	0.992		
1"	1.984		
1 1/2"	1.984		
2"	2.516		
2 1/2"	3.047		
3"	3.579		
4"	4.682		
6"	6.562		
8"	8.602		
10"	10.570		
12"	12.570		

Product link : <https://www.triround-inox.com/double-pin-heavy-duty-clamp-13mhhm-dp.html>