


High Pressure Tri-Clamp (13MHP)

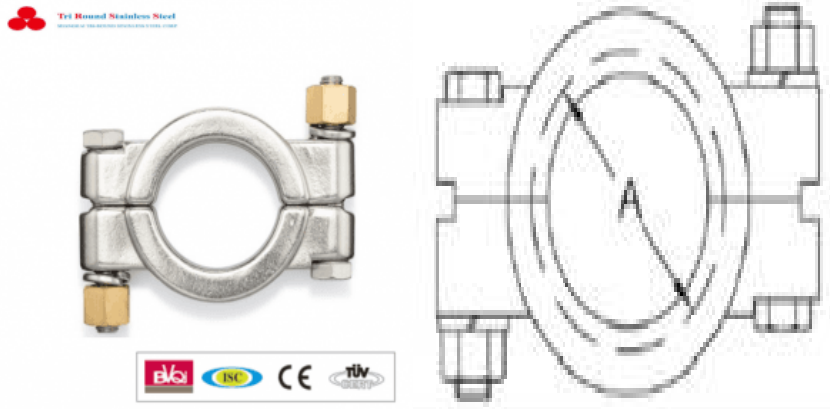

- High-Pressure Double Bolted Tri-Clamps
- Available in 304 Stainless Steel. Nuts are brass.
- Pressure ratings assume wing nut tightened to 20 ft/lb of torque.

Secure high-pressure processing lines with the double-bolted tri-clamp.

This heavy duty clamp is able to withstand higher pressure ratings than our standard single-pin heavy duty clamp. Pressure ratings for this clamp vary depending on application processing temperatures and tubing dimensions. Please consult the reference chart below for specific information.


Bolted Clamps Part Numbers & Dimensions

DOUBLE BOLTED CLAMP SIZES & DIMENSIONS

Size (Tube OD)	Service Pressure Rating at 70°F		Serv
1/2 - 3/4"	1500		
1" - 1-1/2"	1500		
2"	1000		
2-1/2"	1000		
3"	1000		
4"	800		
6"	300		
8"	250		
10"	200		
12"	150		

TRI-CLAMP FITTINGS AND GASKET SIZING GUIDE

**Outside Diameter
(OD)**

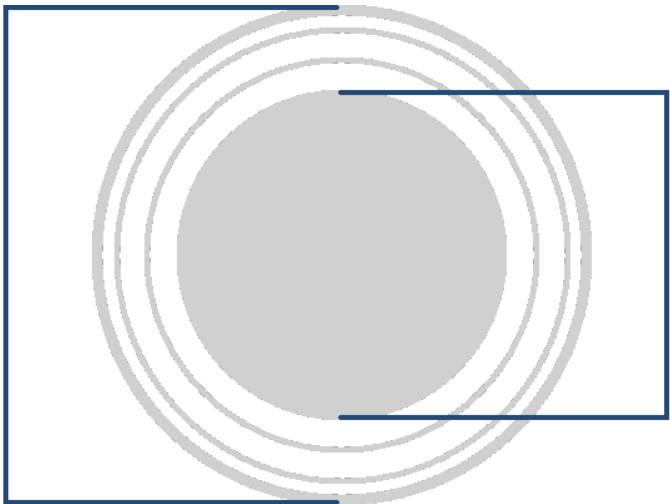

**Inside Diameter
(ID)**

Sanitary Size	OD of Flange End		
1/2"	0.992		
3/4"	0.992		
1"	1.984		
1 1/2"	1.984		
2"	2.516		
2 1/2"	3.047		

3"	3.579		
4"	4.682		
6"	6.562		
8"	8.602		
10"	10.570		
12"	12.570		

Product link : <https://www.triround-inox.com/high-pressure-tri-clamp-13mhp.html>