


Reducer Coupling

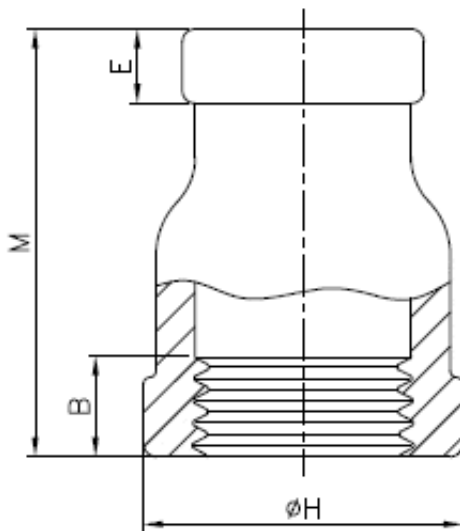

SIZ	1/8"		1/4"		3/8"		1/2"		3/4"		1"		1-1/4"		1-1/2"		2"		2-1/2"		3"		4"	
E	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
B (Min.)	6.35	0.25	8.13	0.32	9.14	0.36	10.92	0.43	12.7	0.5	14.73	0.58	17.02	0.67	17.78	0.7	19.05	0.75	23.37	0.92	24.89	0.98	27.43	1.08
E (Min.)	5.08	0.2	5.08	0.2	5.33	0.21	6.35	0.25	6.8	0.27	7.62	0.3	8.64	0.34	9.4	0.37	10.67	0.42	12.19	0.48	13.97	0.55	16.76	0.66
H (Min.)	19.05	0.75	21.34	0.84	25.65	1.01	30.48	1.2	37.08	1.46	44.96	1.77	54.61	2.15	61.72	2.43	75.18	2.96	84.07	3.31	101.6	4	128.52	5.06
M (Min.)	-	-	25.4	1	28.45	1.12	35.05	1.38	3.1	1.5	41.15	1.62	50.8	2	53.85	2.12	63.5	2.5	82.55	3.25	93.47	3.68	111.25	4.38

Product link : <https://www.triround-inox.com/reducer-coupling.html>