
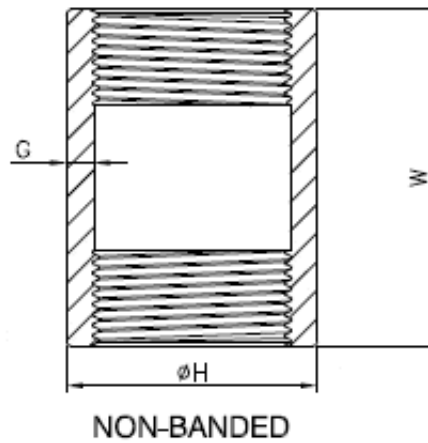


Coupling

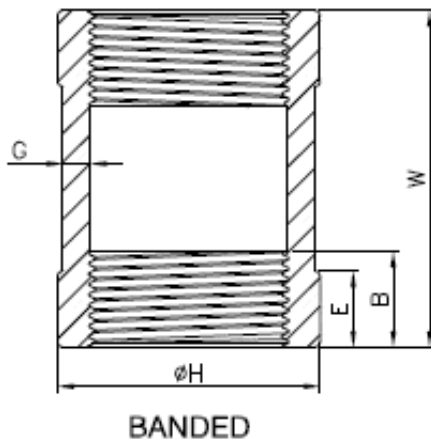

SIZ	1/8"		1/4"		3/8"		1/2"		3/4"		1"		1-1/4"		1-1/2"		2"		2-1/2"		3"		4"	
E	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
B (Min.)	6.3	0.25	8.1	0.32	9.1	0.36	10.0	0.4	12.0	0.5	14.0	0.55	17.0	0.67	17.0	0.7	19.0	0.75	23.0	0.9	24.0	0.95	27.0	1.06
E (Min)	5.0	0.2	5.0	0.2	5.3	0.21	6.3	0.25	6.8	0.27	7.6	0.3	8.6	0.34	9.4	0.37	10.0	0.4	12.0	0.48	13.0	0.51	16.0	0.63

.)																								
G	2.2 9	0.0 9	2.2 9	0.0 9	2.5 4	0.1	2.5 4	0.1	3.0 5	0.1 2	3.3 3	0.1 3	3.5 6	0.1 4	3.8 1	0.1 5	4.3 2	0.1 7	5.3 3	0.2 1	5.8 4	0.2 3	6.6	0.2 6
H (Min)	19. 05	0.7 5	21. 34	0.8 4	25. 65	1.0 1	30. 48	1.2	37. 08	1.4 6	44. 96	1.7 7	54. 61	2.1 5	61. 73	2.4 3	75. 18	2.9 6	84. 07	3.3 1	101 .6	4	128 .52	5.0 6
W (Min)	25. 4	1	25. 4	1	28. 45	1.1 2	35. 05	1.3 8	38. 1	1.5	41. 15	1.6 2	50. 8	2	53. 85	2.1 2	63. 5	2.5	72. 9	2.8 7	80. 77	3.1 8	93. 47	3.6 8

Product link : <https://www.triround-inox.com/coupling.html>