


45° Tri-Clamp x Butt-Weld Elbow

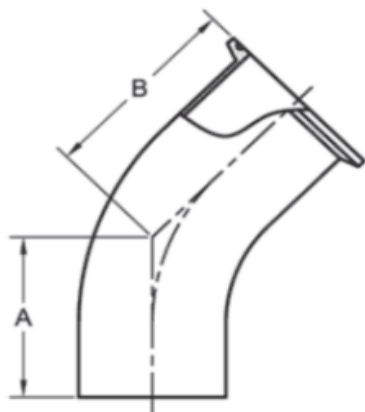

- Sanitary Tri Clamp x Weld 45° Elbow
- Available in 304 & 316L Stainless Steel
- 3-A Sanitary Standards for Sanitary Fittings

Easily connect stainless steel tri-clamp to butt-weld sanitary line processes at 45 degrees.

The 45° tri-clamp elbow is available in both [304](#) and [316L](#) alloy, stainless steel. Clamp adapters such as the [single pin heavy duty clamp](#) with wing nut or [bolted clamp](#) should be used to properly secure joining ends. Welded end will remain permanently in place, fixing the position of this sanitary fitting. This product is 3A certified for sanitary-grade line process equipment. Highly polished and sanded to a level suitable for food, beverage or pharmaceutical usage.

Size (Tube OD)	Materials			
	304L	316L	A	
1/2"	NA	316L	2.250	
3/4"	NA	316L	2.250	
1 "	304L	316L	1.180	
1-1/2"	304L	316L	1.625	
2 "	304L	316L	2.312	
2-1/2"	304L	316L	3.000	
3 "	304L	316L	3.688	
4 "	304L	316L	4.812	
6 "	304L	316L	6.750	

TRI-CLAMP FITTINGS AND GASKET SIZING GUIDE

Sanitary Size	OD of Flange End		ID of T
1/2"	0.992		0.37
3/4"	0.992		0.62
1"	1.984		0.87
1 1/2"	1.984		1.37
2"	2.516		1.87

2 1/2"	3.047		2.37
3"	3.579		2.87
4"	4.682		3.83
6"	6.562		5.78
8"	8.602		7.78
10"	10.570		9.78
12"	12.570		11.76

Product link : <https://www.triround-inox.com/45o-tri-clamp-x-butt-weld-elbow.html>