


Stainless Steel Forged Fittings NPT & Socket Welded Tee

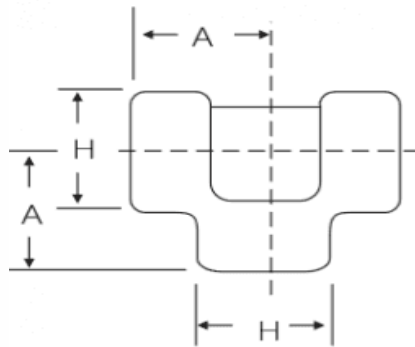

Type: Forged NPT fittings Cross

Size: 1/8"-4"

公称管子规格		90°弯头,三个通,四通 中心到端 Center to End Elbows, Tees, Cross A			45°弯头中心到端 Center to End 45° Elbow C			箍圈外径 Outside Diameter of Band H			最小壁厚 Minimum Wall Thickness Gmin.			螺纹厚度 Length of Thread Min(1)	
DN	Nom. Pipe Size	2000	3000	6000	2000	3000	6000	2000	3000	6000	2000	3000	6000	B	L2
6	1/8	21	21	25	17	17	19	22	22	25	3.18	3.18	6.35	6.4	6.7
8	1/4	21	25	28	17	19	22	22	25	33	3.18	3.30	6.60	8.1	10.2
10	3/8	25	28	33	19	22	25	25	33	38	3.18	3.51	6.98	9.1	10.4
15	1/2	28	33	38	22	25	28	33	38	46	3.18	4.09	8.15	10.9	13.6
20	3/4	33	38	44	25	28	33	38	46	56	3.18	4.32	8.53	12.7	13.9
25	1	38	44	51	28	33	35	46	56	62	3.68	4.98	9.93	14.7	17.3
32	1-1/4	44	51	60	33	35	43	56	62	75	3.89	5.28	10.59	17.0	18.0
40	1-1/2	51	60	64	35	43	44	62	75	84	4.01	5.56	11.07	17.8	18.4
50	2	60	64	83	43	44	52	75	84	102	4.27	7.14	12.09	19.0	19.2
65	2-1/2	76	83	95	52	52	64	92	102	121	5.61	7.65	15.29	23.6	28.9
80	3	86	95	106	64	64	79	109	121	146	5.99	8.84	16.64	25.9	30.5
100	4	106	114	114	79	79	79	146	152	152	6.55	11.18	18.67	27.7	33.0

Standard: ASTM A-182/ANSI/DIN/MSS-SP-97/ JIS B2316

Pressure: ANSI B16.11 CLASS 3000Lbs、 6000Lbs、 9000Lbs

Socket welded connection according to ANSI B16.11

NPT threaded connection according to ANSI B2.1

Material: Stainless steel F304L,310S, F316L,317L, F347,904L, S31803, S32750,254SMO, Inconel 625

Product

link : <https://www.triround-inox.com/stainless-steel-forged-fittings-npt-socket-welded-tee.html>